


**AlliedSignal**  
**BENDIX/KING KLN 89/89B**  
**GPS RNAV**

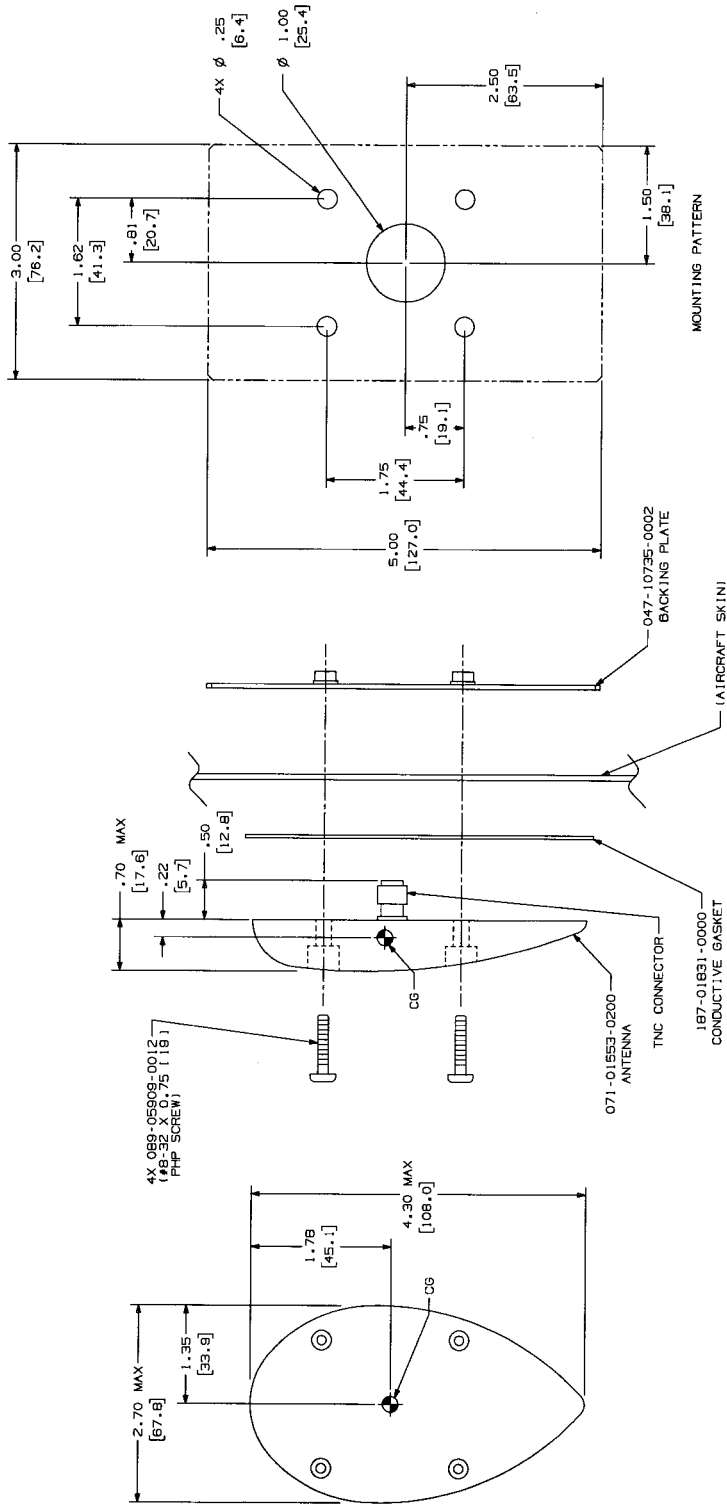

- NOTES UNLESS OTHERWISE SPECIFIED:
1. REMOVE PAINT IN AREA OF ANTENNA INSTALLATION.
  2. DIMENSION IN INCHES (MILLIMETERS)
  3. FOR BEST PERFORMANCE, BOND BETWEEN AIRCRAFT AND ANTENNA TO BE 10 MILLIOHMS RESISTANCE OR LESS.
  4. UNIT WEIGHT IS .27 LBS (.12 KG)
  5. APPLY WHITE RTV SEALANT AROUND BASE OF INSTALLED ANTENNA. FILL MOUNTING SCREW HOLES WITH RTV SEALANT. (KRN 016-01129-0000 OR EQUIVALENT)
  6. ANTENNA SHOULD BE MOUNTED LEVEL  $\pm 5^\circ$  WITH AIRCRAFT AT LEVEL FLIGHT ATTITUDE.
  7. DO NOT PAINT ANTENNA.
  8. AIRSPEED RATING BOOK'S MAX TAS.

**FIGURE 2-8 KA 92 INSTALLATION DRAWING**  
**Dwg. No. 155-06019-0000, R-2**

155060190000-02.prt